


RS-X 130


Midrange specifications:



Name		HG-130RSX-3
DC resistance	R _{dc}	2,7Ω
Nominal impedance	Z _N	3Ω
Resonance frequency	f _s	67,49 HZ
Voice coil diameter		25 mm
Mechanical Q factor	Q _{ms}	3,13
Electrical Q factor	Q _{es}	0,48
Total Q factor	Q _{ts}	0,42
Moving mass	M _{ms}	10,27 g
Effective piston area	S _d	85 cm²
Mechanical resistance	R _{ms}	1,51 Kg/s
Compliance	C _{ms}	0,54 mm/N
Force factor	BL	4,76Tm
Equivalent air volume	V _{as}	5,49 dm³
Efficiency	η	0,34 %
SPL 2,83V/1m		92,01 dB

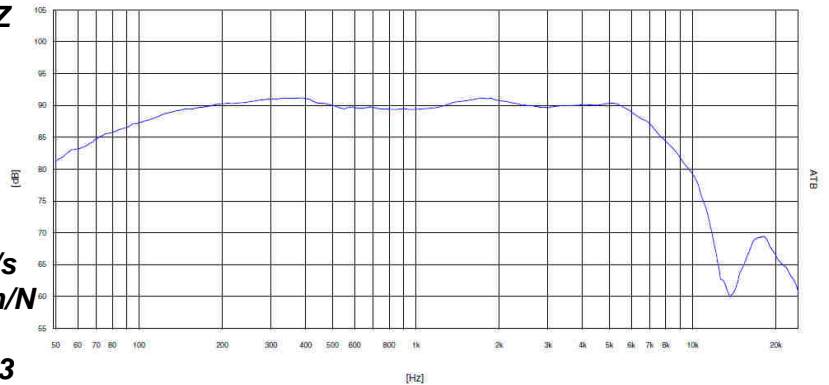

Cone: **Paper**
 Spider: **Nomex**
 Surround: **Rubber**
 Coil former: **Aluminum**
 Basket: **Steel**
 Dust cap: **Paper**

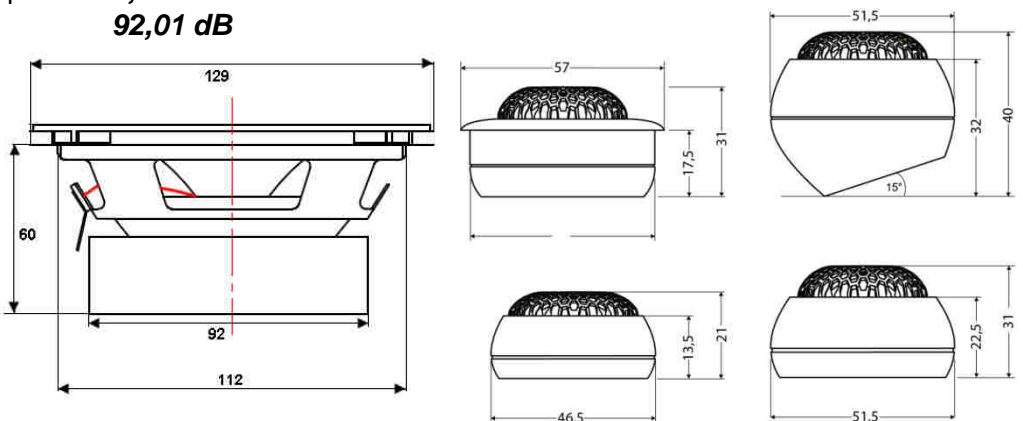

Tweeter specifications:

Name		HG-28GF
DC resistance	R _{dc}	3,5Ω
Nominal impedance	Z _N	4Ω
Resonance frequency	f _s	1290 HZ
Voice coil diameter		28 mm

